


PARTS TO CONNECT TO WIRING OR THE PROCESS

COMPRESSION FITTINGS			
For 1/8" diameter sheath			
Part Number	NPT	Body/Nut	Ferrule
PF38	1/8"	304 stst	304 stst
PF39	1/8"	304 stst	Teflon®
PF40	1/4"	304 stst	304 stst
PF41	1/4"	304 stst	Teflon®
For 3/16" diameter sheath			
PF52	1/8"	304 stst	304 stst
PF53	1/8"	304 stst	Teflon®
PF54	1/8"	Brass	Brass
PF55	1/4"	304 stst	304 stst
PF56	1/4"	304 stst	Teflon®
PF59	1/2"	304 stst	304 stst
PF60	1/2"	304 stst	Teflon®
For 1/4" diameter sheath			
PF63	1/8"	304 stst	304 stst
PF65	1/4"	304 stst	304 stst
PF66	1/4"	304 stst	Teflon®
PF67	1/4"	Teflon®	Teflon®
PF68	1/4"	Brass	Brass
PF73	1/2"	304 stst	304 stst
PF74	1/2"	304 stst	Teflon®
PF75	1/2"	Brass	Brass




PF38 to PF75

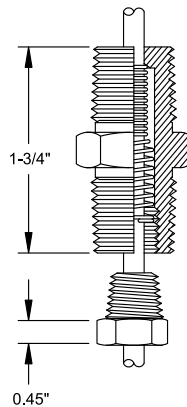



PF13 to PF18

SPRING-LOADED FITTINGS			
Standard, Non-sealed			
Part Number	Process Conn.	Conduit Conn.	Sensor Diameter
PF13	1/2" NPT	1/2" NPT	3/16"
PF14	1/2" NPT	1/2" NPT	1/4"
PF17	3/4" NPT	3/4" NPT	3/16"
PF18	3/4" NPT	3/4" NPT	1/4"
O-Ring Sealed*			
PF21	1/2" NPT	1/2" NPT	3/16"
PF22	1/2" NPT	1/2" NPT	1/4"
PF25	3/4" NPT	3/4" NPT	3/16"
PF26	3/4" NPT	3/4" NPT	1/4"
Notes:			
1. Maximum pressure rating 15 psi			
2. Buna N O-ring rated for -23 to 93°C (-10 to 200°F)			

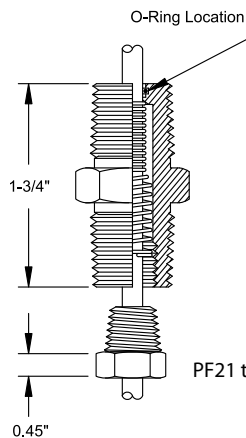

PF21 to PF26

PLUGS AND JACKS	
(Note: specify J, K, E or T calibration. e.g., PT05-J)	
PT05	Standard plug, rated to 177°C (350°F)
PT06	Standard jack, rated to 177°C (350°F)
PT07	High Temp. plug, rated to 260° (500°F)
PT08	High Temp. jack, rated to 260° (500°F)
PT09	Miniature plug, rated to 177°C (350°F)
PT10	Miniature jack, rated to 177°C (350°F)
PA9	Rubber boot for use with PT05/PT06
PA10	Cable clamp for PT05 to PT08
PA11	Neoprene bushing for use with PA10 to prevent wire abrasion

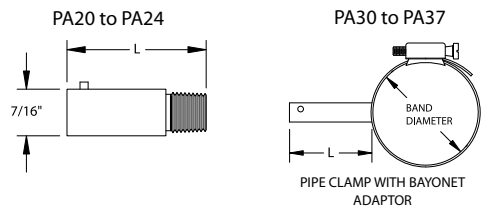

BAYONET ADAPTERS (PLATED STEEL)		
Part Number	Thread Size	Length (L)
PA20	1/8" - 27 NPT	7/8"
PA21	1/8" - 27 NPT	1"
PA22	1/8" - 27 NPT	1-1/2"
PA23	1/8" - 27 NPT	2"
PA24	1/8" - 27 NPT	2-1/2"
PIPE CLAMP AND BAYONET ADAPTERS		
Part Number	Band Diameter	Adapter Length (L)
PA30	1-1/4" to 2-1/4"	1"
PA31	1-1/4" to 2-1/4"	2"
PA32	2-1/4" to 3-1/4"	1"
PA33	2-1/4" to 3-1/4"	2"
PA34	3-1/4" to 4-1/4"	1"
PA35	3-1/4" to 4-1/4"	2"
PA36	4-1/4" to 5"	1"
PA37	4-1/4" to 5"	2"