

**CONNECTION HEAD WITH WELDED NPT PROCESS CONNECTION**

**How to build a part number:**

To order an Applied Sensor Technologies temperature sensor, select the requirements for the categories listed below and fill in the corresponding boxes with your selection. Don't see exactly what you need? Give us a call!

SENSOR TYPE	ASSEMBLY STYLE	SHEATH DIAMETER	SHEATH MATERIAL	CALIBRATION	HOT JUNCTION	SHEATH LENGTH	OPTIONS

**SENSOR TYPE**

**MI** – Mineral insulated thermocouple

**ASSEMBLY STYLE**

**15 – Sheath with cast aluminum head and 1/2" NPT welded stainless steel**

**process connection;** head conforms to NEMA 4 requirements; 3/4" NPT conduit connection; ceramic terminal block; gasketed screw cover with stainless steel chain  
(Note: for spring-loaded assembly, see Style 75 and add optional head)

**SHEATH DIAMETER** (in inches)

**4** – 1/8 (0.125)

**6** – 3/16 (0.188)

**7** – 1/4 (0.250)

**9** – 3/8 (0.375)

**SHEATH MATERIAL**

**2** – 316 stainless steel (available on diameters 6 & 7, with K or KK calibration)

**3** – 316 stainless steel

**5** – Inconel® 600

**CALIBRATION** – Standard limits

**J** – Single J

**JJ** – Dual J

**K** – Single K

**KK** – Dual K

**T** – Single T

**TT** – Dual T

**E** – Single E

**EE** – Dual E

*Special limits are available – consult AST*

**HOT JUNCTION**

**G** – Grounded junction


**U** – Ungrounded junction

**E** – Exposed junction

**SHEATH LENGTH** (Note: lengths over L84 will be shipped coiled unless otherwise specified at time of order)

**L#** – (e.g., L6 = 6" sheath, L12.5 = 12.5" length)

**OPTIONS** – see page 1-1b

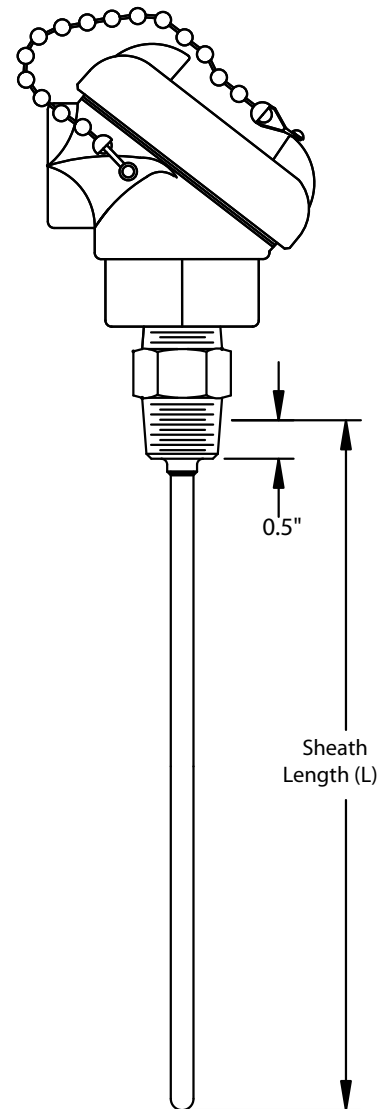

# STYLE 15

## AVAILABLE OPTIONS and MODIFICATIONS

ASSEMBLY OPTIONS	
Option Code	Description
TAG1	Stainless steel tag and wire
PC25	1/4" NPT process connection
PC75	3/4" NPT process connection
CAL1	NIST traceable calibration [specify point(s)]
CRT1	Certificate of conformance
WC20	Wiring cable gland for 0.187 - 0.312 diameter cables, for terminal heads with 1/2" NPT conduit connections
WC21	Wiring cable gland for 0.125 - 0.187 diameter cables, for terminal heads with 1/2" NPT conduit connections
TRANSMITTERS – For complete specs, see Transmitters section	
TR11	4-20 mA, 2-wire transmitter, single input, isolated output; specify range, units of measure (e.g., 0-200°C) and optional terminal head with *.
TR12	4-20 mA, 2-wire transmitter, single input, non-isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.
TR13	HART®/ 4-20 mA, 2-wire transmitter, single input, isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.

NEMA 4 OR 4X TERMINAL HEAD OPTIONS			
Head without ground screw	Head with internal ground screw	Process Connection	Conduit Connection
Cast aluminum, screw cover with chain, NEMA 4			
HD10*	HD11*	1/2"	1/2"
Std.*	HD13*	1/2"	3/4"
Epoxy-coated aluminum, screw cover with chain, NEMA 4X			
HD50*	HD51*	1/2"	1/2"
HD52*	HD53*	1/2"	3/4"
Cast iron, screw cover with chain, NEMA 4			
HD20*	HD21*	1/2"	1/2"
HD22*	HD23*	1/2"	3/4"
316 stainless steel, screw cover with chain, NEMA 4X			
HD40*	HD41*	1/2"	3/4"
White polypropylene, screw cover with chain, NEMA 4			
HD30	N/A	1/2"	3/4"
Black polypropylene, screw cover with chain, NEMA 4			
HD31	N/A	1/2"	3/4"
Nylon, screw cover			
HD32	N/A	1/2"	1/2"
*can be used with transmitters			

**Notes:**

1. See Accessories for additional information.
2. For former Style 60, use option HD20.
3. For former Style 29, use option HD32.