

SPRING-LOADED PROCESS MOUNTING HARDWARE WITH OPTIONAL TERMINAL HEAD

How to build a part number:

To order an Applied Sensor Technologies temperature sensor, select the requirements for the categories listed below and fill in the corresponding boxes with your selection.

SENSOR TYPE	ASSEMBLY STYLE	CONNECTION TYPE AND MATERIAL	CONN. LENGTH	SHEATH DIAMETER	SHEATH MATERIAL	CALIBRATION	HOT JUNCTION	SHEATH LENGTH	LEADWIRE LENGTH	OPTIONS

SENSOR TYPE

MI – Mineral insulated thermocouple

ASSEMBLY STYLE

48 – Sheath with spring-loaded hex connector and connection hardware; head as option

CONNECTION TYPE AND MATERIAL

Code	Union Type	Union Material	Lower Nipple Material
NU	Ordinary location	Carbon steel	None
NUS	Ordinary location	Stainless steel	None
NUX	Explosion-proof	Electroplated steel	None
NUN	Ordinary location	Carbon steel	Carbon steel
NUNS	Ordinary location	Stainless steel	Stainless steel
NUNX	Explosion-proof	Electroplated steel	Carbon steel
NUNXS	Explosion-proof	Electroplated steel	Stainless steel

CONNECTION LENGTH (For NU, NUX, NUS, use 002.5)

(e.g., 006 = 6 inch)
(See chart for available standard lengths)

SHEATH DIAMETER (in inches)

- 4** – 1/8" (0.125)
- 6** – 3/16" (0.188)
- 7** – 1/4" (0.250)
- 9** – 3/8" (0.375)

SHEATH MATERIAL

- 3** – 316 stainless steel
- 5** – Inconel® 600

CALIBRATION – Standard limits

- J** – Single J **JJ** – Dual J
 - K** – Single K **KK** – Dual K
 - T** – Single T **TT** – Dual T
 - E** – Single E **EE** – Dual E
- Special limits are available – consult AST*

HOT JUNCTION

- G** – Grounded junction
- U** – Ungrounded junction

SHEATH LENGTH (Note: lengths over L84 will be shipped coiled unless otherwise specified at time of order)


L# – (e.g., L6 = 6 inch sheath, L12.5 = 12.5 inch length)

LEADWIRE LENGTH

X# – (e.g., X3 = 3 inch length; X3 is standard if specifying optional head)

OPTIONS – see back page

STANDARD AVAILABLE CONNECTION LENGTHS FOR NUN CONNECTIONS
3.00
3.50
4.00
4.50
5.00
6.00
7.00
8.00
9.00
DIMENSIONS ARE GIVEN IN INCHES

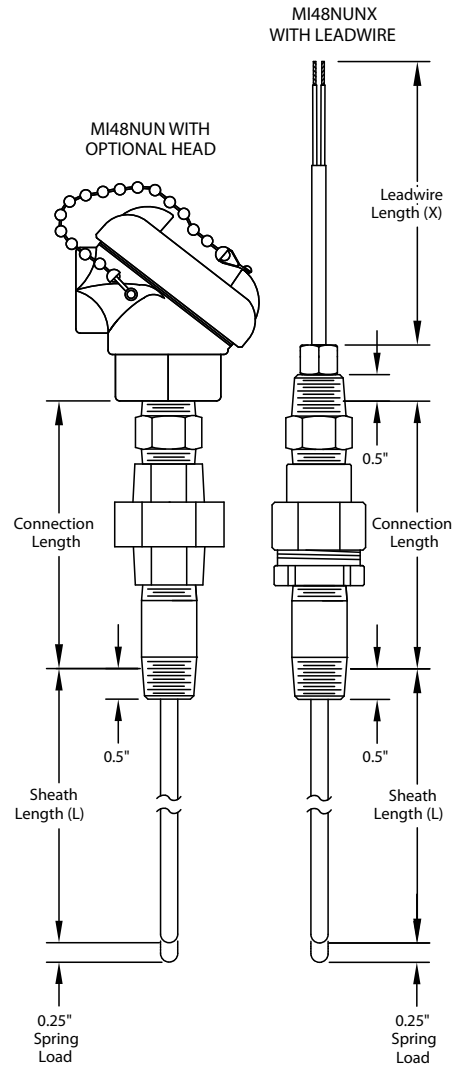

STYLE 48

AVAILABLE OPTIONS and MODIFICATIONS

ASSEMBLY OPTIONS	
Option Code	Description
TAG1	Stainless steel tag and wire
CAL1	NIST traceable calibration [specify point(s)]
CRT1	Certificate of conformance
WC20	Wiring cable gland for 0.187 - 0.312 diameter cables, for terminal heads with 1/2" NPT conduit connections
WC21	Wiring cable gland for 0.125 - 0.187 diameter cables, for terminal heads with 1/2" NPT conduit connections
WIRING CONNECTION OPTIONS	
Option Code	Description
WC76	#6 spade terminals, plated copper
WC70	#10 spade terminals, plated copper
WC84	1/4" push-on insulated terminals, plated copper
WC90	#10 ring terminals
WC98	#8 ring terminals
TRANSMITTERS - for complete specs, see Transmitters section	
TR11	4-20 mA, 2-wire; single input; isolated output; specify range, units of measure (e.g., 0-200°C) and terminal head with *. See Accessories section for additional information.
TR12	4-20 mA, 2-wire transmitter, single input, non-isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.
TR13	HART®/ 4-20 mA, 2-wire transmitter, single input, isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.

THERMOWELLS & PROTECTION TUBES

For a complete offering of metal, ceramic and composite material thermowells and protection tubes, please see the Thermowell and Protection Tube sections.

NEMA 4 OR 4X TERMINAL HEAD OPTIONS			
Head without ground screw	Head with internal ground screw	Process Connection	Conduit Connection
Cast aluminum, screw cover with chain, NEMA 4			
HD10*	HD11*	1/2"	1/2"
HD12*	HD13*	1/2"	3/4"
Epoxy-coated aluminum, screw cover with chain, NEMA 4X			
HD50*	HD51*	1/2"	1/2"
HD52*	HD53*	1/2"	3/4"
Cast iron, screw cover with chain, NEMA 4			
HD20*	HD21*	1/2"	1/2"
HD22*	HD23*	1/2"	3/4"
316 stainless steel, screw cover with chain, NEMA 4X			
HD40*	HD41*	1/2"	3/4"
White polypropylene, screw cover with chain, NEMA 4			
HD30	N/A	1/2"	3/4"
Black polypropylene, screw cover with chain, NEMA 4			
HD31	N/A	1/2"	3/4"
Nylon, screw cover			
HD32	N/A	1/2"	1/2"
EXPLOSION-PROOF TERMINAL HEAD OPTIONS			
Option Code	Process Connection	Conduit Connection	
Cast aluminum, screw cover with chain; o-ring gasket rated to 100°C; ceramic terminal block; FM/CSA approved for Class I Div. 1, Groups B, C, D; Class II, Groups E, F, G; internal ground screw			
HD70*	1/2"	1/2"	
HD71*	1/2"	3/4"	
Stainless steel (same specs as HD70/71)			
HD74*	1/2"	1/2"	
HD75*	1/2"	3/4"	
Epoxy-coated (same specs as HD70/71)			
HD80*	1/2"	1/2"	
HD81*	1/2"	3/4"	
Cast aluminum; ATEX approved for EEx d IIC; screw cover with chain; silicone rubber o-ring gasket; ceramic terminal block; rated for NEMA 4X, IP66 to IP68; internal and external ground screws			
HD72*	1/2"	1/2"	
HD73*	1/2"	3/4"	
Cast aluminum (Formerly Style 60); screw cover; plastic terminal block; UL/CSA approved for Class I Div. 1, Groups C and D; Class II Groups E, F and G.			
HD60	1/2"	1/2"	
HD61	1/2"	3/4"	
*can be used with transmitters			

Note: Many non-standard options, including additional sheath diameters and materials, may also be available – consult AST for specific requirements. HART® is a registered trademark of the HART Communication Foundation.